



Max. working pressure/  
Presiune max. de lucru 10 bar



Max. working temperature/  
Temperatură max. de lucru 90 °C



Mounting kit included/  
Kit montaj inclus. **K05**



Factory pressure test/  
Presiune de probă: 13 bar



Elements&collectors/  
Elemente și colectori: Ø22+38 mm




**NEW/NOU**

# Polter



POLTER has a clean and compact design, with elements arranged rhythmically and welded to the 2 vertical collectors. In addition to its heating capabilities, POLTER also serves as a practical and convenient way to dry and warm towels.

POLTER are un design curat si compact, cu elementii orizontali dispusi ritmic si sudati intre cei 2 colectori verticali. Pe lângă eficiența sa de a încălzi spații, POLTER servește și ca o modalitate practică și convenabilă de a usca și încălzi prosoapele

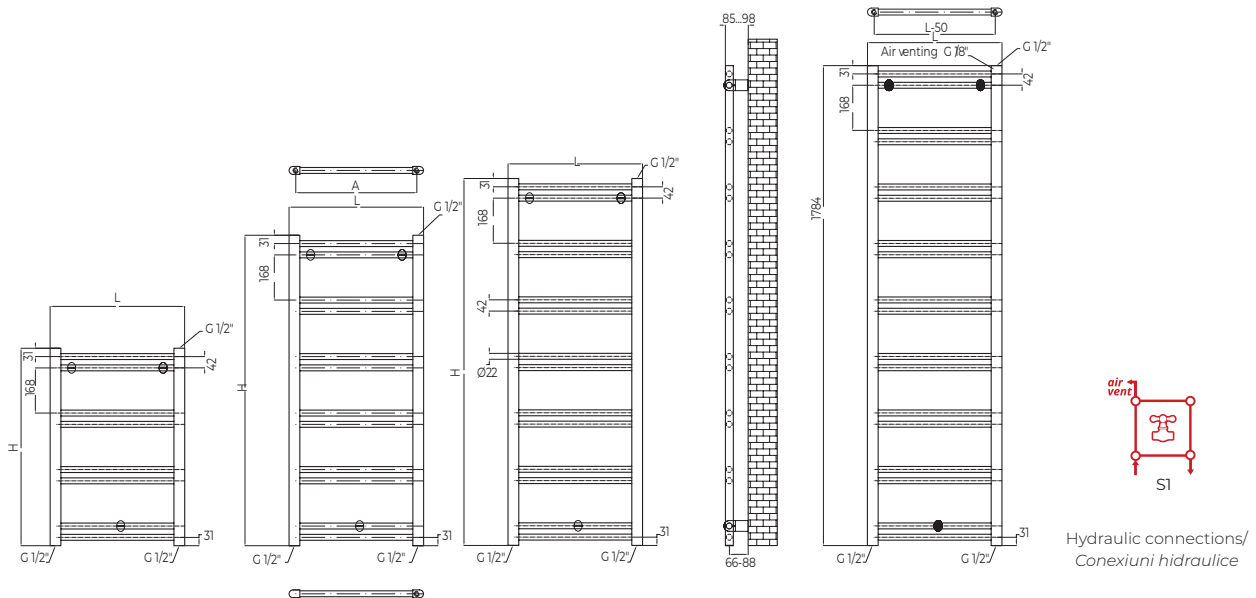

Code Cod	Finish Finisaj	Height Înălțime (H)	Length Lățime (L)	Centres Interax (A)	No el Nr ele- menți	Weight Greutate	Volume Volum	Output / Putere termică (watt)				
								Δt=30°C	Δt=50°C	Δt=60°C	electric	
		mm	mm	mm	pcs	kg	l	W	W	W	W	
POL040/073.4V9010	RAL 9010 white/alb	734	400	350	8	4.52	2.26	120	232	289	300	
POL050/073.4V9010		734	500	450	8	5.13	2.49	138	266	333	300	
POL060/073.4V9010		734	600	550	8	5.73	2.71	156	301	376	300	
POL040/115.4V9010		1154	400	350	12	6.93	3.49	177	340	327	500	
POL050/115.4V9010		1154	500	450	12	7.84	3.83	202	389	486	500	
POL060/115.4V9010		1154	600	550	12	8.75	4.17	227	437	545	500	
POL040/136.4V9010		1364	400	350	14	8.13	4.10	220	422	528	600	
POL050/136.4V9010		1364	500	450	14	9.19	4.50	252	484	605	600	
POL060/136.4V9010		1364	600	550	14	10.26	4.89	284	547	683	600	
POL040/073.4CR		Chrome / Cromat	734	400	350	8	4.52	2.26	93	178	223	300
POL050/073.4CR			734	500	450	8	5.13	2.49	106	205	256	300
POL060/073.4CR			734	600	550	8	5.73	2.71	120	231	289	300
POL040/115.4CR	1154		400	350	12	6.93	3.49	130	262	327	500	
POL050/115.4CR	1154		500	450	12	7.84	3.83	155	299	374	500	
POL060/115.4CR	1154		600	550	12	8.75	4.17	175	336	419	500	
POL040/136.4CR	1364		400	350	14	8.13	4.10	169	325	406	600	
POL050/136.4CR	1364		500	450	14	9.19	4.50	194	373	466	600	
POL060/136.4CR	1364		600	550	14	10.26	4.89	219	420	525	600	

\*\*\*\*\* The mentioned code is for hydronic version./Codul menționat este pentru versiunea hidraulică.