

◀ **Radiator**

Rolo Room E 1800↕ x 370↔ E8,
radiator colour: True Copper,
radiator code: WLROR180037 KTCGE8

Valves and accessories































MOA BLUE, Chrome




ROLO ROOM E





AVAILABLE SIZES

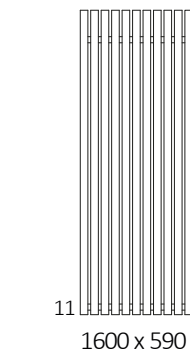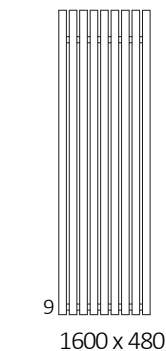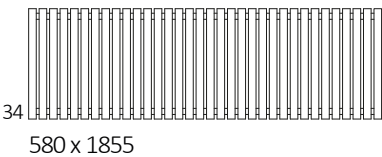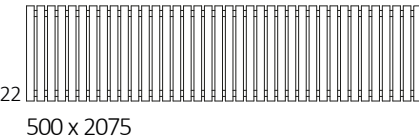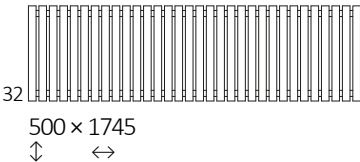

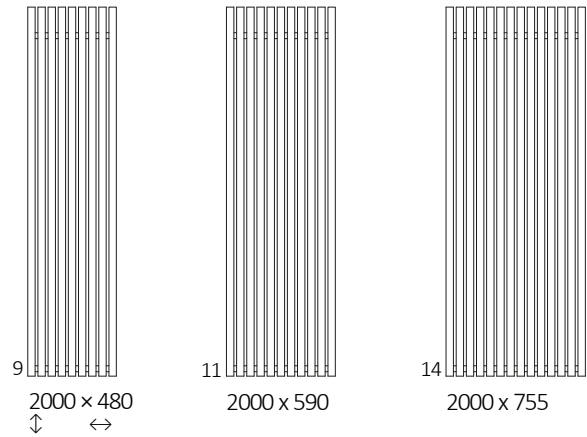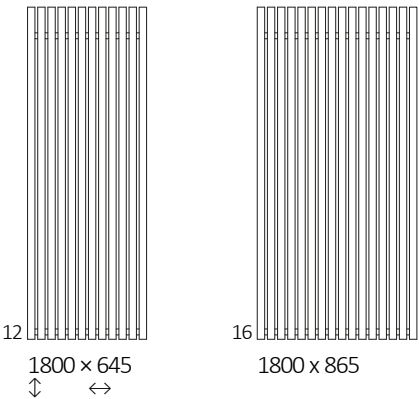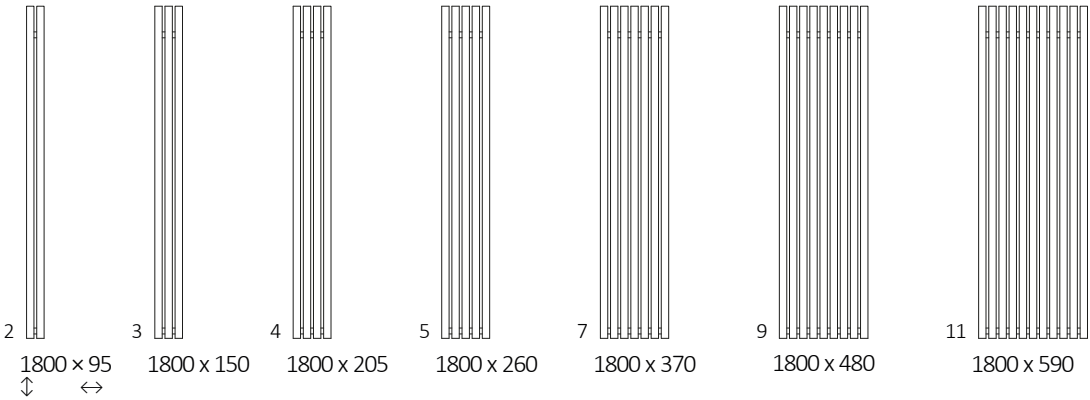

ELECTRIC RADIATOR

Connections

A $\updownarrow$ 500 ÷ 580:A $\updownarrow$ 1200 ÷ 2000:

Height A $\updownarrow$ [mm]	Width B $\leftrightarrow$ [mm]	Heating power [W]	Product code ... Configuration p. 12
500	865	600	WLROR050086
500	1195	800	WLROR050119
500	1470	1000	WLROR050147
500	1745	1200	WLROR050174
500	2075	1500	WLROR050207
580	865	800	WLROR058086
580	1195	1000	WLROR058119
580	1470	1200	WLROR058147
580	1855	1500	WLROR058185
1200	95	200	WLROR120009
1200	150	300	WLROR120015
1200	205	300	WLROR120020
1200	260	400	WLROR120026
1200	370	600	WLROR120037
1200	480	800	WLROR120048
1200	590	800	WLROR120059
1200	755	1200	WLROR120075
1200	975	1500	WLROR120097
1400	95	200	WLROR140009
1400	150	300	WLROR140015
1400	205	400	WLROR140020
1400	260	400	WLROR140026
1400	370	600	WLROR140037
1400	480	800	WLROR140048
1400	590	1000	WLROR140059
1600	95	200	WLROR160009
1600	150	300	WLROR160015
1600	205	400	WLROR160020
1600	260	600	WLROR160026
1600	370	800	WLROR160037
1600	480	1000	WLROR160048
1600	590	1200	WLROR160059
1800	95	300	WLROR180009
1800	150	400	WLROR180015
1800	205	600	WLROR180020
1800	260	600	WLROR180026
1800	370	800	WLROR180037

Height A ↕ [mm]	Width B ↔ [mm]	Heating power [W]	Product code ... Configuration p. 12
1800	480	1000	WLROR180048
1800	590	1200	WLROR180059
1800	645	1500	WLROR180064
1800	865	1500	WLROR180086
2000	480	1200	WLROR200048
2000	590	1500	WLROR200059
2000	755	1500	WLROR200075


DIMENSIONS AND TECHNICAL INFORMATION

Height A ↕ [mm]	Width B ↔ [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity  [dm³]	Weight  [kg]
500	865	715	260	120	9,79	21,90
500	1195	1 045	260	120	13,47	30,14
500	1470	1 320	260	120	16,54	37,01
500	1745	1 595	260	120	19,60	43,86
500	2075	1 925	260	120	23,28	52,09
580	865	715	340	120	11,17	24,92
580	1195	1 045	340	120	15,36	34,27
580	1470	1 320	340	120	18,86	42,07
580	1855	1 705	340	120	23,76	53,00
1200	95	55	960	120	2,71	6,19
1200	150	110	960	120	4,08	9,20
1200	205	165	960	120	5,44	12,22
1200	260	220	960	120	6,81	15,03
1200	370	330	960	120	9,54	21,06
1200	480	440	960	120	12,27	27,09
1200	590	550	960	120	15,00	33,12
1200	755	715	960	120	19,10	42,16
1200	975	935	960	120	24,57	54,22
1400	95	55	1 160	120	3,14	7,12
1400	150	110	1 160	120	4,72	10,61
1400	205	165	1 160	120	6,30	14,09
1400	260	220	1 160	120	7,88	17,58
1400	370	330	1 160	120	11,05	24,56
1400	480	440	1 160	120	14,21	31,53
1400	590	550	1 160	120	17,37	38,48



Height A ↕ [mm]	Width B ↔ [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity  [dm³]	Weight  [kg]
1600	95	55	1 360	120	3,57	8,06
1600	150	110	1 360	120	5,37	12,03
1600	205	165	1 360	120	7,16	15,97
1600	260	220	1 360	120	8,96	19,93
1600	370	330	1 360	120	12,55	27,84
1600	480	440	1 360	120	16,14	35,74
1600	590	550	1 360	120	19,74	43,66
1800	95	55	1 560	120	4,00	9,06
1800	150	110	1 560	120	6,01	13,53
1800	205	165	1 560	120	8,02	18,01
1800	260	220	1 560	120	10,03	22,06
1800	370	330	1 560	120	14,06	30,92
1800	480	440	1 560	120	18,08	39,76
1800	590	550	1 560	120	22,10	48,61
1800	645	605	1 560	120	24,11	53,04
1800	865	825	1 560	120	32,16	70,74
2000	480	440	1 760	120	20,01	43,99
2000	590	550	1 760	120	24,47	53,78
2000	755	715	1 760	120	31,14	68,45

TECHNICAL DRAWING

E2

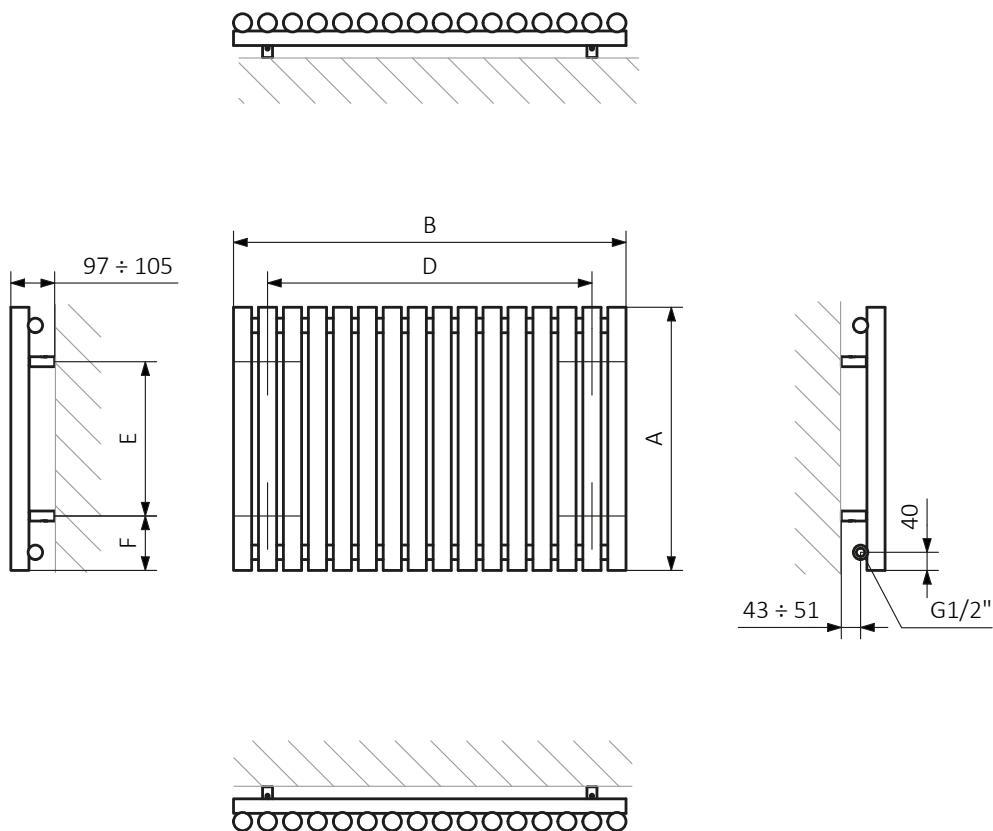


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator



Collector:**Pipe:**

TECHNICAL DRAWING


E7

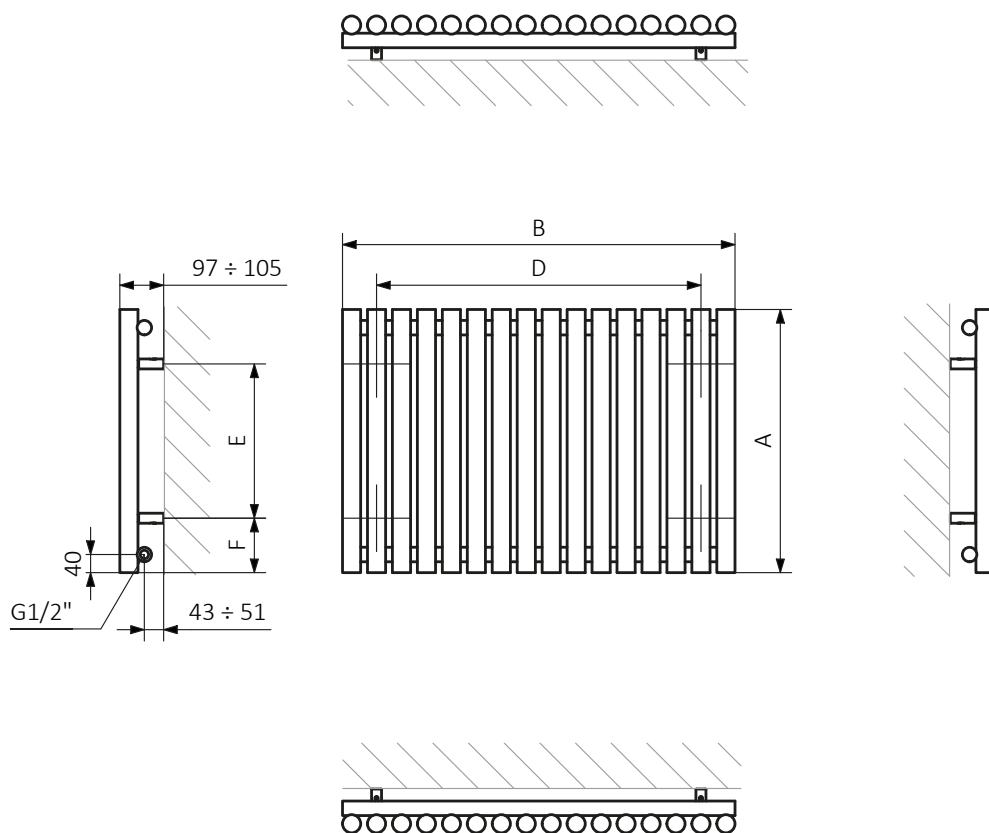

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:**Pipe:**



TECHNICAL DRAWING

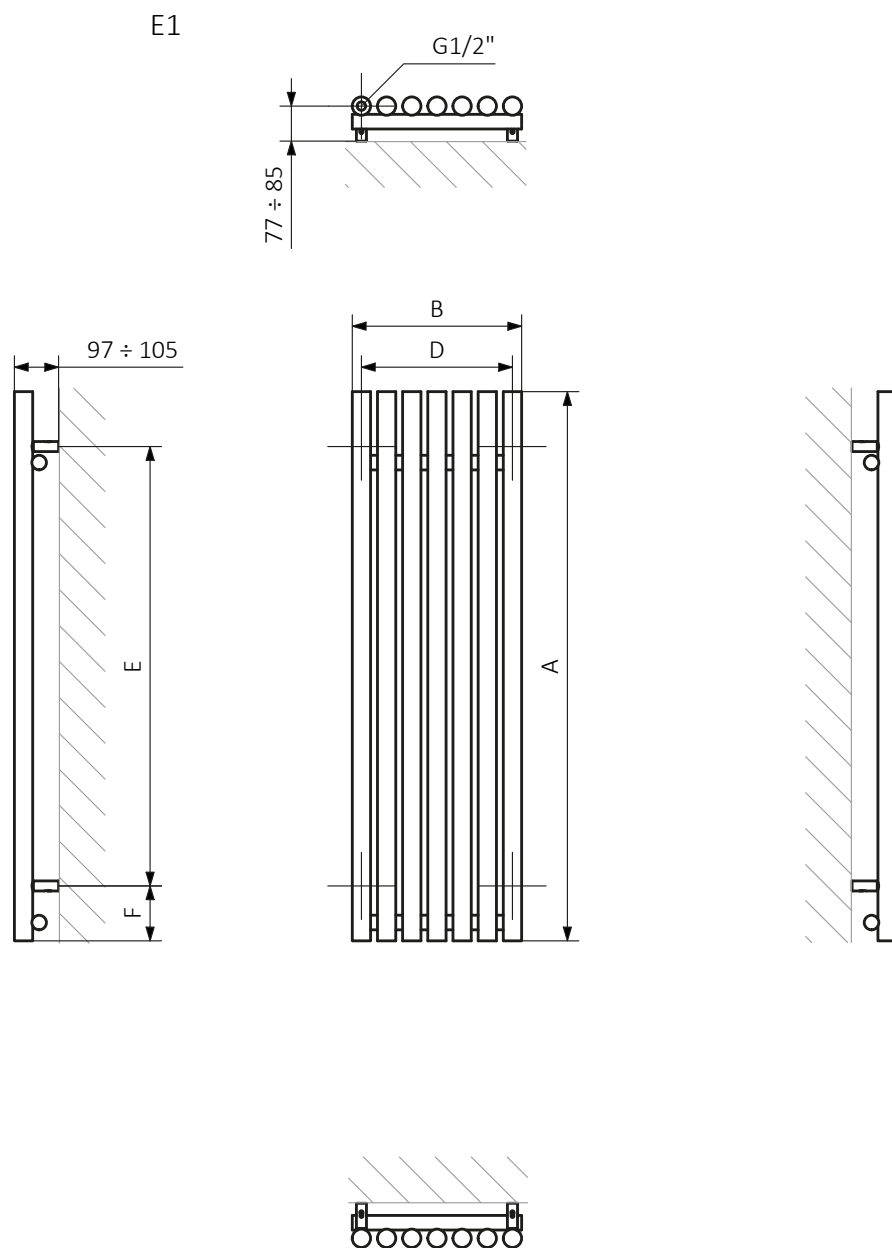

A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator


Collector:

Pipe:





TECHNICAL DRAWING

E8

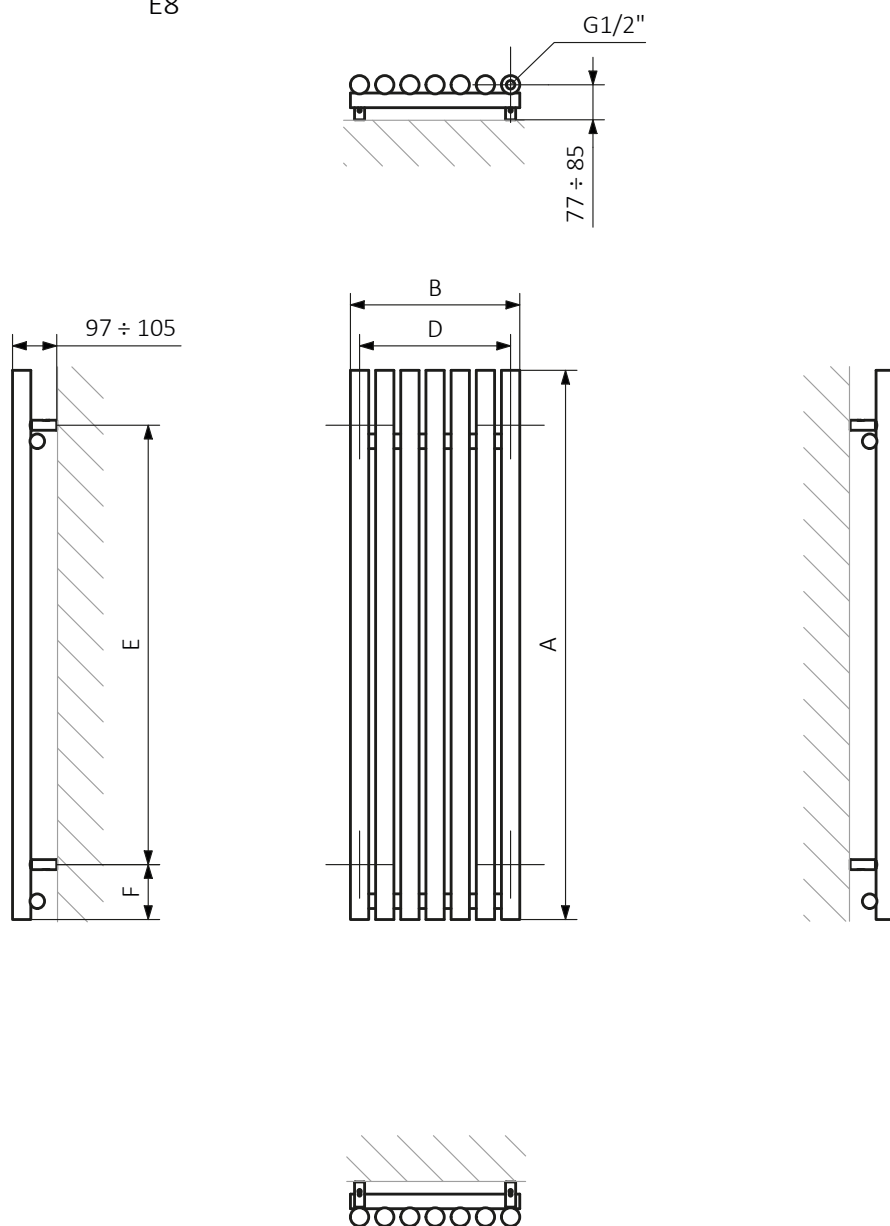


A – Height B – Width D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:**Pipe:**

A CONFIGURATION CODE FOR AN ELECTRIC TOWEL RAIL OR RADIATOR FILLED WITH OIL AND FITTED WITH A HEATING ELEMENT (PRODUCT GROUP „WL”)

Product codes can be found in the product tables in both the catalogue and the price list. They provide basic information about the product, and the configuration code contains information that complements the specification. When placing an order, the product codes should contain the fully completed configuration part. Part of the configuration code should be placed after the main product code as shown in the example below:

CODE DETAILS:

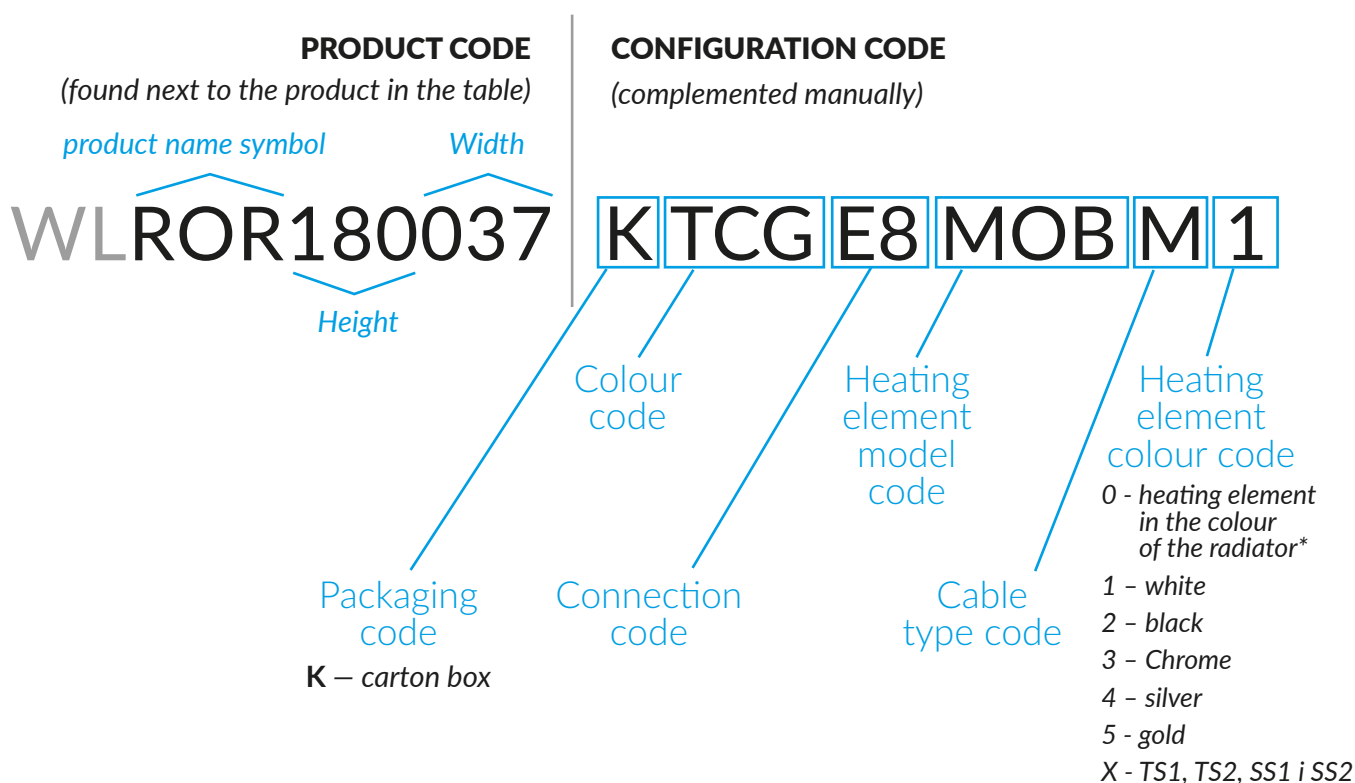

WL – electric towel rail or radiator filled with oil and fitted with a factory installed heating element