





**Mantis One** 860 \$\pm\$ × 440 \$\to S8 colour: Salt&Pepper

ONE heating element







Projekt : Terma

### Standard connections:

### Optional connections:

P1 |









Electric radiators:








#### Available sizes:














### Specifications:


Working pressure: 800 kPa Maximum operating temperature: 82°C

A ↓ [mm]	B ↔ [mm]	75 65 20°c [W]	55 45 20°c [W]	[W]	D [mm]	E [mm]	F [mm]	[dm³]	(kg)	Product Code configuration code p. 5
860	440	351	185	400	400	710	75	2,94	9,34	WZMAE086044
860	540	423	223	400	500	710	75	3,32	11,06	WZMAE086054
1260	440	502	266	600	400	1110	75	4,35	13,86	WZMAE126044
1260	540	605	319	600	500	1110	75	4,91	16,31	WZMAE126054
1560	440	615	326	600	400	1410	75	5,38	17,04	WZMAE156044
1560	540	742	391	800	500	1410	75	6,08	20,06	WZMAE156054






### Technical drawing:

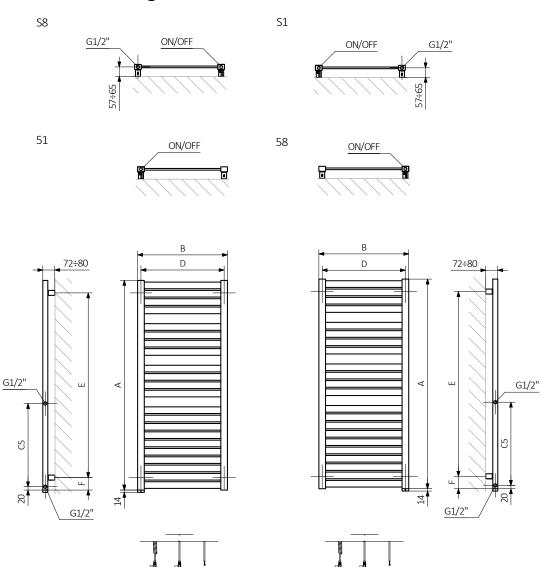

A - Height B - Width C1-C5 - Distance between pipe centres D - Horizontal distance between mounting bracket centres E - Vertical distance between mounting brackets F - Distance between a mounting bracket and the bottom of the radiator







In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

### The construction of a configuration code of a water radiator with a built-in One heating element:

WZMAE086044

K916S1

Cable Type

PRODUCT CODE (located in the table for the product)

CONIGURATION CODE (supplemented by hand)

W - straight cable with plug
P - straight cable without plug
U - spiral cable with plug

#### **Example Configuration**



#### The Construction of the product and configuration code for a radiator with the built-in heating element ONE:

WWMAF086044

K916F1

Cable Type

PRODUCT CODE (located in the table for the product)

CONIGURATION CODE (supplemented by hand)

W - straight cable with plug
P - straight cable without plug
U - spiral cable with plug

#### Example Configuration



### **Epoxy primer**

**E** – Code of epoxy primer is an extra processes.


WZMAE086044 K916S1 E—Extra processes or additions code

TERMA | www.termaheat.com 20180606 MałkowskiPrzemysław page 5 of 6





### Legend

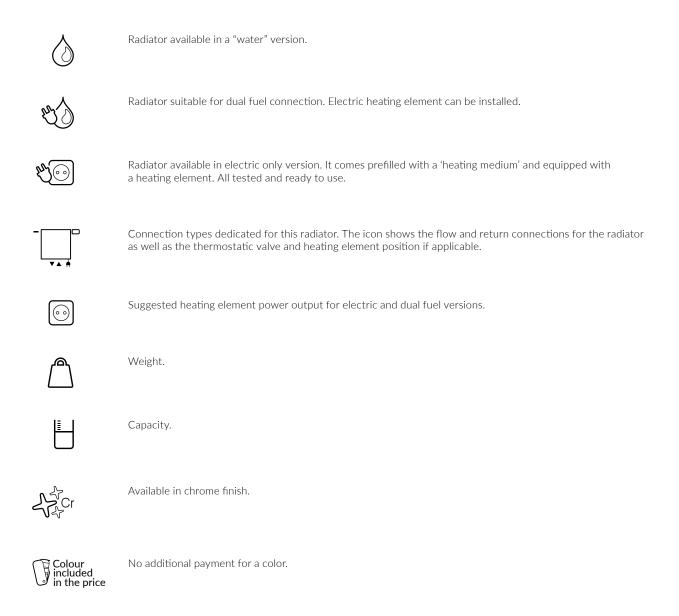

TERMA | www.termaheat.com 20180606 MalkowskiPrzemysław page 6 of 6